## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: MS-belysning

Supplier's address: AS Metall-Service/MS-Belysning, Gardermovegen 95 B, 2030 NANNESTAD, NO

Model identifier: 9400489003


| Type | of light | source: |
|------|----------|---------|
|------|----------|---------|

| Lighting technology used:     | LED            | Non-directional or directional: | NDLS |  |
|-------------------------------|----------------|---------------------------------|------|--|
| Light source cap-type         | integrated LED |                                 |      |  |
| (or other electric interface) |                |                                 |      |  |
| Mains or non-mains:           | NMLS           | Connected light source (CLS):   | No   |  |
| Colour-tuneable light source: | No             | Envelope:                       | -    |  |
| High luminance light source:  | No             |                                 |      |  |
| Anti-glare shield:            | No             | Dimmable:                       | Yes  |  |
| Product parameters            |                |                                 |      |  |

| Froduct parameters                                |   |                            |  |              |  |
|---|---|----------------------------|--|--------------|--|
| Parameter   |   | Value                      | Parameter  | Value        |  |
| General product parameters:                       |   |                            |  |              |  |
|   | mption in on-<br>00 h), rounded<br>st integer                         | 5                          | Energy efficiency class  | F            |  |
| dicating if it refe<br>a sphere (360º)            | s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º) | 521 in Wide<br>cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700        |  |
| On-mode pow<br>pressed in W                       | ver (P <sub>on</sub> ), ex-   | 5,0                        | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,50         |  |
| (P <sub>net</sub> ) for CLS, 6                    | candby power expressed in W the second dec-                           | -                          | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 82           |  |
| Outer dimen-                                      | Height  | 2                          | Spectral power dis-  | See image    |  |
| sions without                                     | Width   | 28                         | tribution in the   | in last page |  |
| separate con-<br>trol gear, light-<br>ing control | Depth   | 28                         | range 250 nm to 800<br>nm, at full-load  |              |  |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |      |                              |       |  |
|--|------|------------------------------|-------|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -    | If yes, equivalent power (W) | -     |  |
|  |      | Chromaticity coordi-         | 0,442 |  |
|  |      | nates (x and y)              | 0,408 |  |
| Parameters for LED and OLED light sources:                                 |      |                              |       |  |
| R9 colour rendering index value  | 3    | Survival factor              | 0,96  |  |
| the lumen maintenance factor   | 0,90 |                              |       |  |

(a)'-': not applicable; (b)'-': not applicable;

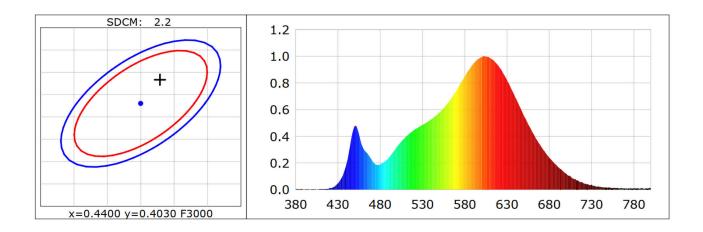

Model placed on the Union market from 01/04/2019



**EPREL registration number:** 2170559 https://eprel.ec.europa.eu/qr/21

70559

Supplier: AS METALL-SERVICE (Importer) Website: www.ms-belysning.no

**Customer care service:** 

Name: AS Metall-Service/MS-Belysning Website: www.ms-belysning.no

Email: post@ms-belysning.no Phone: +4763888500

Address:

Gardermovegen 95 B 2030 NANNESTAD

Norway